


Tactics Legend

- DF** Deflection Booming
- DV** Diversion Booming
- EX** Exclusion Booming
- FO** Free Oil Recovery
- PR** Passive Recovery
- SR** Shoreside Recovery
- S** Staging Area
-  Boat Ramp
- TG** Tide Gate
-  Protected-Water Boom
-  Open-Water Boom
-  Snare/ Sorbent Boom

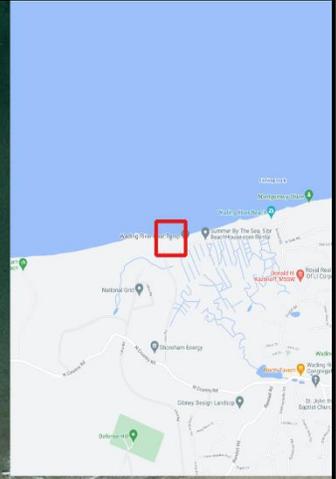

Equipment - All Tactics

Boom(ft)	1200
Marine anchors	6
Shore anchors	4
Sorbent Boom(ft)	0
FO Recovery Sys	0
Shore Responders	2
Boat Responders	2
Boats	2

Response Trailer and GIS Data Information

CT DEEP has 6 pre-positioned oil spill response trailers, each with 1,000 ft (one with 5,000 ft) of boom and other equipment. Contact CT DEEP Emergency Dispatch for more information.

Location

Latitude: 40° 57' 46.8"
Longitude: -72° 51' 35.9994"
NOAA Chart # 12354

Version

2/6/2023

NY DEC has pre-positioned oil spill response trailers equipped with boom, absorbent material and other equipment. Contact NY DEC Oil Spill Hotline for more information.

Geographic Response Strategy

Wading River LI02

Tactic #	Purpose	Response Equipment	Deployment Resources	Deployment Notes
SR-01 	Remove spilled oil that has been diverted to a designated recovery site accessible from shore	1 skimming system 1 storage tank or bladder 1 hoses, pumps, fittings	2 shore responders	Set up shoreside recovery tactic at general location depicted on map. Some access points located at private residences. Access may be difficult
		N/A	Testing Date	
DV-01 	Redirect spilled oil from one location or direction of travel to a specific site for recovery.	400 ft protected water boom 2 marine anchor system 2 shoreline anchor system	2 shore responders 1 response boats 1 boat operators	Tend through tidal changes. Deploy boom as depicted to divert incoming oil to the collection site. Anchor every 200-300'. Adjust angle as necessary to reduce entrainment. Set up shoreside recovery and tend throughout tide. Deploy shoreside anchor first.
			Testing Date	
EX-02 	Prohibit oil slicks from entering a sensitive area	800 ft open water boom 4 marine anchor system 2 shoreline anchor system	2 shore responders 1 response boats 1 boat operators	Tend through tidal changes. Deploy boom as depicted to exclude oil from sensitive areas. Anchor every 200-300'. Not tide dependent Deploy shoreside anchor first. Readjust boom angle as needed to reduce entrainment
			Testing Date	

Local contacts

Audubon New York	516-922-3200
Long Island Soundkeeper	203-854-5330
Mattituck Fire Department	631-298-8837
Mt Sinai Fire Department	631-473-2418
Port Jefferson Fire Department	631-473-3232
Riverhead Terminal	800-937-2682
Riverhead Fire Department	631-727-2750
Rocky Point Fire Department	631-744-4102
Sound Beach Fire Department	631-744-2151
Southold Fire Department	631-765-3385
Wading River Fire Department	631-929-4340
NY Div. of Fish and Wildlife	631-444-0280
NY Div. of Marine Resources	631-444-0430
NY DEC Oil Spill Hotline	1-800-457-7362 (24 hr)
NY State Office of Emergency Mgmt	518-292-2200 (24 hr)
USFWS LI Field Office	631-286-0485
USCG Sector Long Island Sound	203-468-4401
National Response Center	800-424-8802



Entrance to Wading River at site of EX-02 looking north



Site of DV-01 looking north toward Long Island Sound

Resources Protected

See most current data in NOAA Environmental Sensitivity Index (ESI) Map 24 or reference applicable data layer in NOAA Environmental Response Management Application (ERMA)

Navigational Hazards

Significant tide range in this area and current in Wading River.

Special Considerations

Survey site prior to deployment and modify deployment tactics and techniques as appropriate based on observed conditions. If ice is present GRS tactics and strategies must be reevaluated.